



### AUTOCLEAR 492 SR (3:1) HS SCRATCH RESISTANT CLEAR COAT

The very well know AUTOCLEAR 492 HS (3:1) is now available with SCRATCH RESISTANT properties in order to be fully compliant with the E.U. legislation of VOC emissions. Mix with HARDENER HS 724 STANDARD (#724) NEW FORMULA or HS 723 FAST (#723) NEW FORMULA @ 3:1. Due to its high build, excellent levelling, fast hardening and high gloss, this product is suitable for all top quality full and partial (spot panel) refinishes. Using HS 723 FAST (#723) or 727 POLAR hardener will reduce the curing time to 15 - 20 min @ 60°C (140°F). Ready for assembly work, minor repairs and polishing 20 min after baking.

**Size:** 1L, 5L  
**Hardener (Standard - Fast):** 333ml, 1L, 2,5L  
**Color:** transparent

### AIR DRYING AUTOCLEAR 495 SR (4:1) SCRATCH RESISTANT

Extremely fast drying Scratch Resistant clear coat suitable for high volume shops. Ensures durable gloss and offers excellent resistance to extreme weather conditions. Mix with HARDENER 720 NORMAL (#720) @ 4:1. Dries rapidly, 3-4 hours air dry and 15min @ 60°C (140°F). Due to the rapid drying it is recommended for spot and panel repairs up to half a car. For even faster air drying, mix with Hardener 727 POLAR and 20 ml TURBO AX 715 for every 250 ml of ready for use product. ▶ 5 min dust free @ 23°C ▶ 40 min ready for assembly @ 23°C ▶ 60 min ready for polishing @ 23°C ▶ Scratch resistant ▶ Crystal clear

**Size:** 1L, 5L  
**Hardener:** 250ml, 500ml, 1L, 2,5L  
**Color:** transparent



### AUTOCLEAR 496 SR (2:1) SCRATCH RESISTANT CLEAR COAT

The very well know AUTOCLEAR 496 HS with SCRATCH RESISTANT properties in order to be fully compliant with the E.U. legislation of VOC emissions. Mix at a ratio of 2:1 with HARDENER 720 NORMAL (#720), 722 FAST (#722) or 727 POLAR (#727). Using BODY HARDENER 727 POLAR and 20ml TURBO AX 715 for every 250ml ready for use product the curing time can be reduced to 10 - 15 min @ 60°C (140°F). Assembly work and polishing can be carried out only 10 minutes after baking.

**Size:** 1L, 5L  
**Hardener:** 500ml, 1L, 2,5L  
**Color:** transparent




HB BODY S.A.  
 570 22 Sindos Industrial Area  
 Thessaloniki - Greece  
 TEL. +30 2310 790 000, FAX +30 2310 790 010  
<http://www.hbbody.com>, e-mail: [exsales@hbbody.com](mailto:exsales@hbbody.com)



HB BODY UK LTD.  
 UNITS 1-4 St. Martins Industrial Park, Cabot Park  
 Avonmouth, Bristol UK, BS 11 0RS  
 TEL. +44 1179 824949, FAX +44 1179 824250  
<http://www.hbbody.co.uk>, e-mail: [sales@hbbody.co.uk](mailto:sales@hbbody.co.uk)

SEP 2012 M0912002 - UK

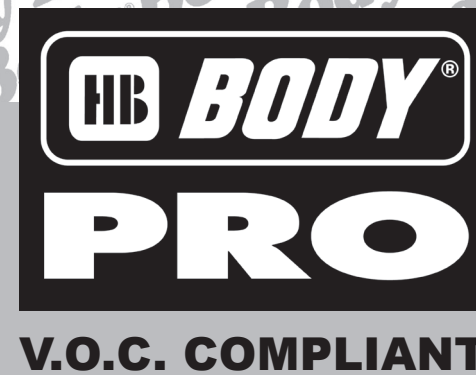

PROFESSIONAL  
 LINE

PRODUCT CATALOGUE

PROFESSIONAL  
 REFINISHING  
 SYSTEM





### AUTOFLEX SPECIAL 951

A rubber based Sound deadening / sealing compound. Suitable for application to the internal or external parts of the underbody, with high ageing stability. Ready for use, it is applied with a special spray gun (BODY UBS) at a pressure of 5-6 bar (A shortened nozzle results in a fine finish where as a long one in a coarse finish). Permanently elastic, fast drying, very good adhesion and it can be overpainted "wet on wet" with synthetic paints or with single coat/base coat.

**Size:** 1L, 400ml **Colors:** white, black, grey

### AUTOSEAL SPECIAL 115

A refined rubber based sealer specifically developed to bond metal surfaces and joint fillings. Suitable for sealing the internal parts of the car body that are not directly exposed to UV rays. Easily applied with manual or pneumatic gun. Depending on the thickness, dries quickly, remains elastic without losing its shape. Can be overcoated with all paint systems.

**Size:** 1Kg, 300ml **Color:** light grey



### HB BODY PRO P 980 - 1K FILLING PRIMER

Fast drying fully compliant 1K filling primer suitable for all kinds of paints (synthetic - single coat or base coat). Must be applied in thin layers (1,3 - 1,8 mm) over sanded areas only. Can be sanded within 10-30 min. Must be diluted 4:1 with BODY ACRYL THINNER (REDUCER) (#740 NORMAL).

**Size:** 1L, 4L **Color:** grey



### HB BODY PRO P 980 - 1K FINE FILLER

One component fine filler, ideal for finishing of small uneven surfaces. Apply 2-3 coats allowing 20 - 30 minutes for thorough drying and subsequently sand with fine sandpaper P 600 - P 1000. It can be overcoated with any type of primer or paint.

**Size:** 150gr **Colors:** grey, green



### UNIFINE 225 - 2K UNIVERSAL POLYESTER FILLER

Two component fine polyester filler/stopper, suitable for application over all metal surfaces (galvanized steel, aluminium, stainless steel, bare steel, chrome). Also suitable for plastic bumpers (excluding PE), polyester substrates and existing painted surfaces. Easily applied and extremely easy to sand with P 150 - P 400 grit paper. Produces a perfect pinhole free surface without clogging the sanding materials. Can be air dried or dried by using either short or medium infrared lamps.

**Size:** 380gr, 1,5Kg, 3Kg, 3Kg cartridge **Color:** white

### BODYLITE 230 - LIGHT POLYESTER FILLER

A two component light polyester filler for metal, wood and polyester surfaces. A fine particle filler with excellent filling properties. Fast drying and can be sanded with P 80 - P 180 grit paper for a perfect pinhole free finish without clogging the sanding paper.

**Size:** 1L, 3,5L **Color:** grey



### HB BODY PRO P334 4:1 HS HIGH BUILD FILLING - SEALING PRIMER

HB BODY PRO P334 is a high quality acrylic - filling sealing primer for partial and full automotive refinishes. Suitable for original or old paint work, for plastic parts and ideal for unsanded O.E.M. (E-COAT) panels. Its versatility enables both application at normal, medium and high film thickness with intermediate sanding or "wet on wet" application. Dues to its high filling power and vertical stability, higher film thickness is possible. The fast drying and excellent levelling of this primer guarantee efficient application and fast sanding. It is cured with an isocyanate based BODY HARDENER 725 FOR PRIMERS (# 725). One of its greatest advantages is that it is ready for sanding after 1 - 1,5 hours air dry @ 23°C (73°F). When using as a "wet on wet" application Body 720 Hardener Normal and 50% Body 740 is required.

**Size:** 1L, 4L **Hardener:** 250ml, 1L **Colors:** white, black, grey

**WARNING: BY USING HB BODY PRO A715 TURBO AX THE POT LIFE OF THE READY FOR USE MATERIAL BECOMES VERY SHORT. FOR THIS REASON THE MATERIAL MUST BE APPLIED IMMEDIATELY.**



### FIBERLIGHT F217 - 2K POLYESTER FIBERGLASS

Two component light polyester filler reinforced with fibre glass for bridging and filling of cavities. Also suitable for filling over corroded surfaces. Easy to apply, dries quickly and is extremely easy to sand with P 80 - P 120 grit paper. Resulting in a high resistant and elastic surface.

**Size:** 500ml, 1L, 2L **Color:** green



### BODY 290 - ULTRA LIGHT MULTIFILLER

Body 290 is a two component polyester filling product providing excellent adhesion and elasticity over all metallic, wood and polyester surfaces. A fine particle filler that spreads smoothly giving a pin-hole free finish. It dries quickly providing excellent sanding properties for a perfect finish. Extremely easy to sand with P 180 - P 400.

**Size:** 1L, 3L **Color:** light grey



### HB BODY PRO P335 5:1 HS HIGH BUILD FILLING - SEALING PRIMER

HB BODY PRO P335 is a high quality acrylic - filling sealing primer for partial and full automotive refinishes. Suitable for original or old paint work and ideal for unsanded O.E.M. (E-COAT) panels. Its versatility enables both application at normal, medium and high film thickness with intermediate sanding. Dues to its high filling power and vertical stability, higher film thickness is possible. The fast drying and excellent levelling of this primer guarantee efficient application and fast sanding. It is cured with an isocyanate based BODY HARDENER 725 FOR PRIMERS (# 725). One of its greatest advantages is that it is ready for sanding after 2 hours air dry @ 23°C (73°F).

**Size:** 1L, 4L **Hardener:** 200ml, 1L **Colors:** white, black, grey

**WARNING: BY USING HB BODY PRO A715 TURBO AX THE POT LIFE OF THE READY FOR USE MATERIAL BECOMES VERY SHORT. FOR THIS REASON THE MATERIAL MUST BE APPLIED IMMEDIATELY.**



### BUMPERSOFT - 2K BUMPER POLYESTER FILLER (PUTTY)

Two component polyester filler (putty) with excellent adhesion to plastic bumpers excluding PE (Polyethylene). Simply degrease using ANTISIL 770 (NORMAL) or ANTISIL 771 (FAST) and a non woven pad prior to application. Extremely easy to sand with P 120 - P 240 grit paper for a perfect pinhole free finish. Does not clog sand paper. Excellent mechanical resistance due to its high elasticity.

**Size:** 250gr, 1Kg **Color:** black



### BODYFILL 360 2K HS SANDING / WET-on-WET FILLING PRIMER 2:1

Ideal adhesion to unsanded OEM panels. High quality acrylic primer for partial and full passenger car refinishes. Its versatility enables both application at normal, medium and high film thickness with intermediate sanding or "wet-on-wet application". The good absorption of overspray and excellent levelling guarantee outstanding results. It is cured with an isocyanate based BODY 720 NORMAL (#720) / BODY 725 (#725) @ 2:1. When using as a "wet on wet" application Body 720 Hardener Normal and 50% Body 740 is required.

**WARNING: BY USING HB BODY PRO A715 TURBO AX THE POT LIFE OF THE READY FOR USE MATERIAL BECOMES VERY SHORT. FOR THIS REASON THE MATERIAL MUST BE APPLIED IMMEDIATELY.**

**Size:** 1L, 4L **Colors:** white, grey, black

**Aerosol:** 400ml **Colors:** white, black, yellow, red, blue, green, grey



### P 961 - 1K ETCH PRIMER

One component acid cured, adhesion promoter and anticorrosive primer. Suitable for application over all metal surfaces (galvanized, aluminium, stainless steel, bare metal, chrome). Dilute with thinner (reducer) BODY ACRYL (#740 NORMAL - #741 SLOW) @ 2:1 ratio. Fast drying 45 min @ 23°C (73°F) / 20 min @ 60°C (140°F). Suitable for "wet-on-wet" application over brand new panels where filler has not been applied. When using over old paint BODYFILL 961 can be used as a filling primer which must be sanded before painting. Adheres nicely to non sanded surfaces and can be painted over with all paint systems.

**Size:** 1L, 4L, aerosol 400ml **Color:** grey



### HB BODY PRO C494 CLEAR COAT ULTRA HS (2:1)

HB BODY PRO C494 ULTRA HS is a crystal clear, high gloss fully compliant clear coat clear coat from our "2K - Acryl - system". Due to its high build, excellent levelling, fast hardening and high gloss this product is suitable for all top quality full and partial (spot panel) refinishes. Due to its high solid content HB BODY PRO C494 CLEAR COAT ULTRA HS is a more environmental friendly product. Due to its superior coverage it is a far more economical product than conventional clears. Using H735 FAST HARDENER, the curing time is reduced to 20 min @ 60°C (140°F).

**Size:** 1L, 5L **Hardener:** 500ml, 2,5L **Color:** transparent

